


High current spring contact Back fitment - HD-PD11JXT-SP



Test Probes & Interfacing Components

Telephone: +44 (0)1787 478678 | sales@coda-systems.co.uk | technical@coda-systems.co.uk | Fax: +44 (0)1787 274194

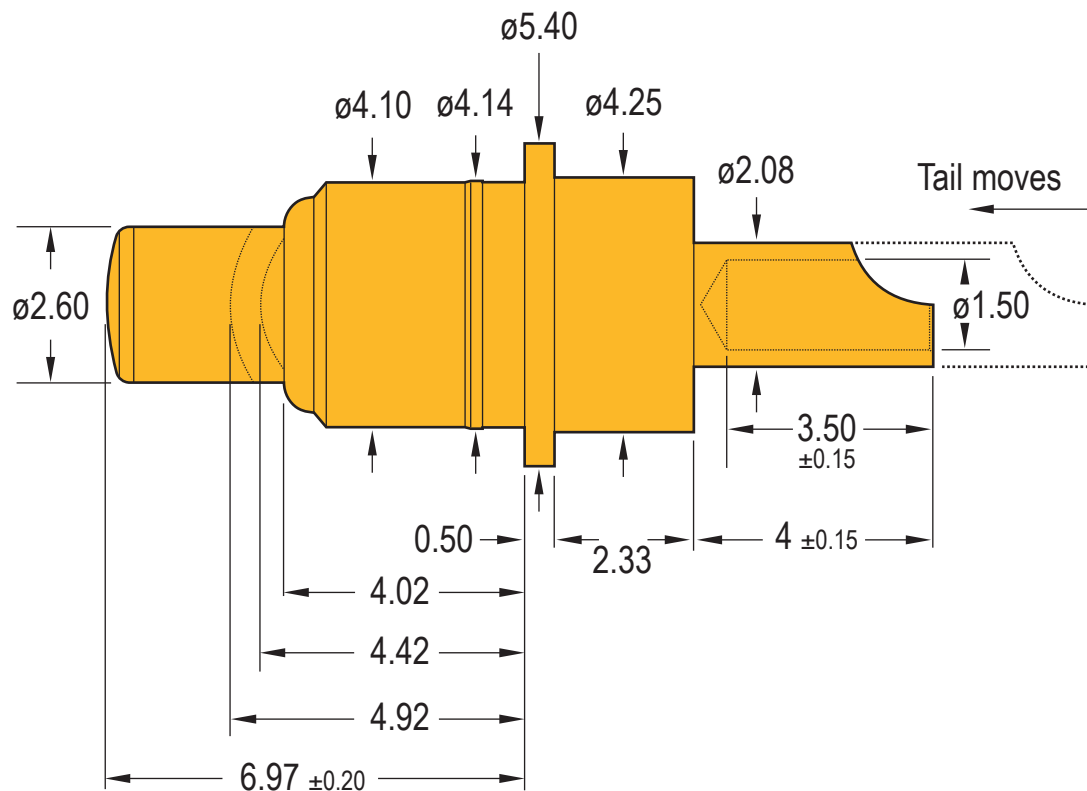

Specifications

Materials

Plunger & Barrel; Brass C3604
Spring; SUS304

Plating

Contact Surface;
0.25µm minimum Au over 1-2µm Ni

Electrical

Rated current & voltage; 12V DC; 10A max, cable
connected to tail

Mechanical

Spring force; 170g +/-20% at working height
Durability; 10,000 cycles (minimum)
Working compression; 2.05mm

Installation

- Panel thickness; 4.5mm
- Mounting hole size; 4.1mm
- Connection method;
solder wire into solder pot

PART NUMBER HD-PD11JXT-SP		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE A4	SCALE NTS	DRAWN IN ACCORDANCE WITH ISO STANDARDS	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHIN 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
RoHS Compliant? <input checked="" type="checkbox"/>		DATE 09/04/20	
		VERSION D2	