

Sealing contact land, Flat head,
solder pot or solder in.
IPP5-ORING




**Test Probes &
Interfacing Components**

Telephone: +44 (0)1787 478678


sales@coda-systems.co.uk

technical@coda-systems.co.uk


Top view



Side view

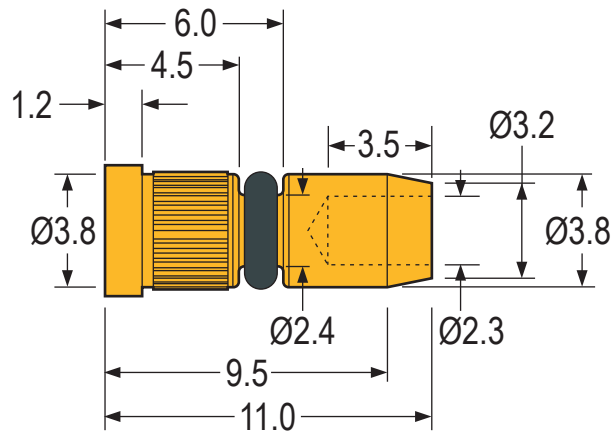

Back view



Specifications

Materials

Brass

Plating

0.22µm Au Hard Gold over 2.5-5µm Nickel

Installation

- Press fitment
- Solder pot cable connection or solder in
- Drill hole size; 3.8mm
- Panel thickness; 5-7mm



PART NUMBER IPP5-ORING		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE A4	SCALE NTS	DRAWN IN ACCORDANCE WITH ISO STANDARDS	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
RoHS Compliant? <input checked="" type="checkbox"/>			