


PC9JS

Non-replaceable, press-fit
spring contact, solder pot



Test Probes & Interfacing Components

Telephone: +44 (0)1787 478678 | sales@coda-systems.co.uk | technical@coda-systems.co.uk | Fax: +44 (0)1787 274194

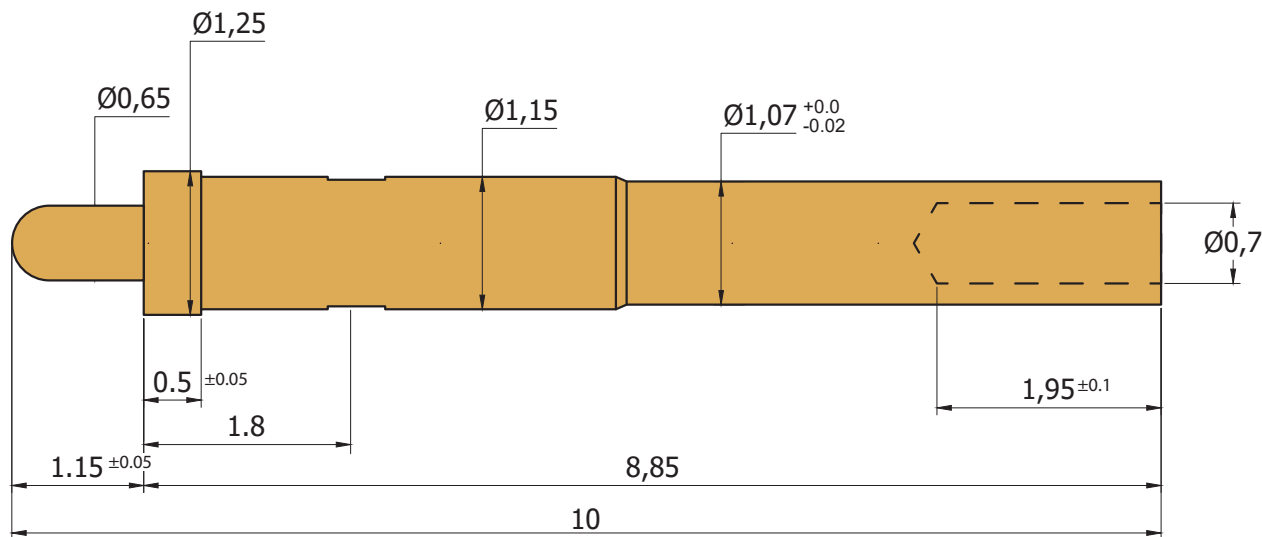

Specifications

Materials

Body: plunger BeCu, gold plated
Spring: music wire, gold plated

Electrical

Rated current at working height: 2 amps

Mechanical

Working height; 0,76mm
Full travel; 1.15mm
Spring force; 90g ±20% at working height
Temperature range; -45 - +105°C

Design

To ensure the best usage please ensure
operation position is based on the working height

Installation

Press fitment from the front
Mounting hole size: 1.12mm (hard plastics),
1.05mm (soft plastics)
Connection method: solder pot

PART NUMBER PC9JS		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE A4	SCALE NTS	DRAWN IN ACCORDANCE WITH ISO STANDARDS	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHIN 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
RoHS Compliant? <input checked="" type="checkbox"/>		VERSION A1	
		DATE 22/9/25	

Unless otherwise specified all tolerances dimensions are ±0,12mm