



SD-POWER-6-SC-PRO
Spring loaded interface
array, long travel, high current,
hard wire connection.




Telephone: +44 (0)1787 478678

sales@coda-systems.co.uk



technical@coda-systems.co.uk

Test Probes & Interfacing Components

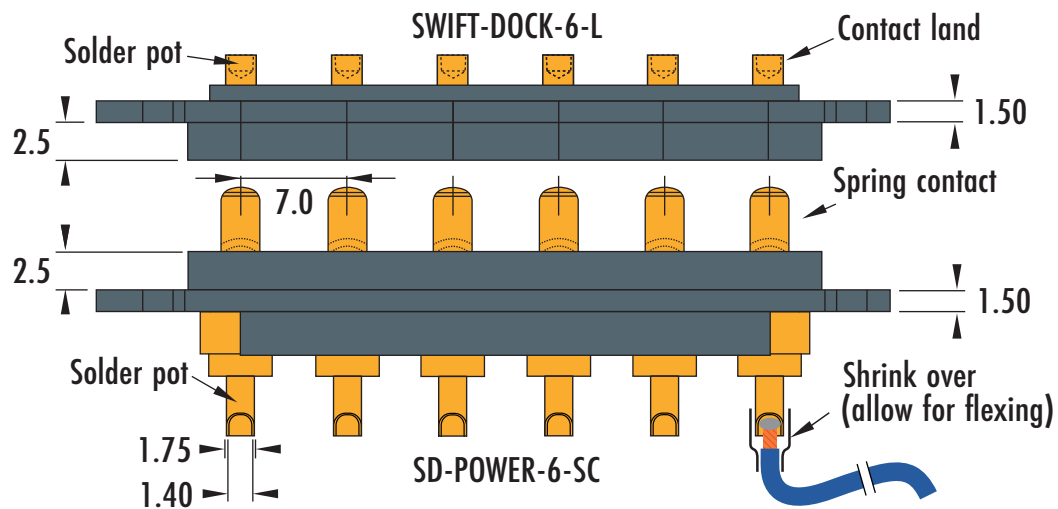


Spring contact: HD-LPD11JXT-SP
Contact land: IPP2S

SPRING FORCE	170g
COMBINED SPRING FORCE (x6)	1020g

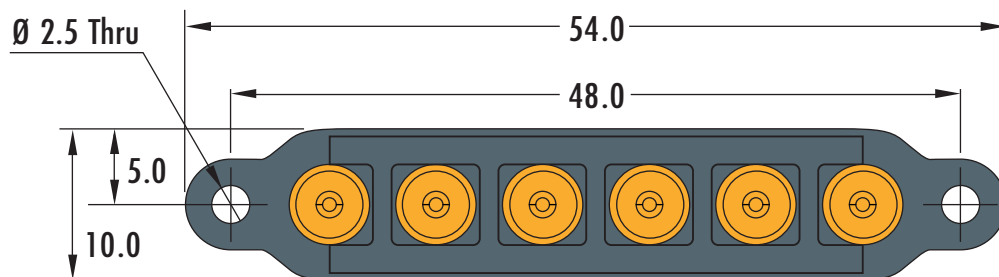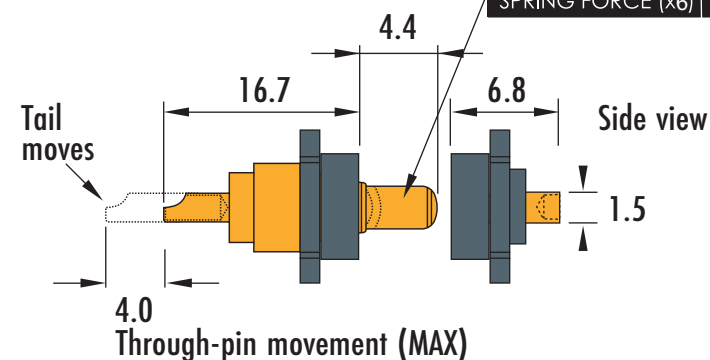

Back view spring contact side

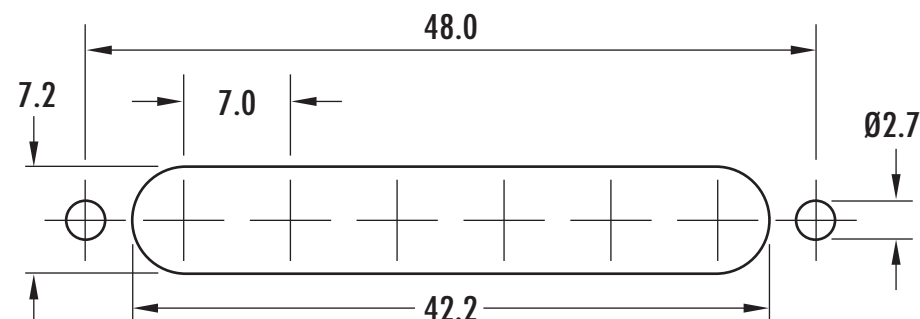

Panel cutout dimensions



PART NUMBERS				SD-POWER-6-SC-PRO & SWIFT-DOCK-6-L		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.			
SIZE	SCALE	PLASTIC TYPE				TOLERANCES			
A4	2:1	POLYAMIDE PA66		✓		LINEAR .x = ± 0.2mm .xx = ± 0.10mm .xxx = ± 0.025mm		UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES	
RoHS Compliant?						SURFACE ANGULAR ± 1°			
ENGINEER	VERSION	CHECKED BY		DATE	DRAWN IN ACCORDANCE WITH ISO STANDARDS				
G.D	D3	H.D		23/07/26					