

IPM3G Sealed Contact Land
Bolt-in fitment supplied with O-ring + nut
Can be soldered





Test Probes & Interfacing Components

Telephone: +44 (0)1787 478678

sales@coda-systems.co.uk


technical@coda-systems.co.uk

Specifications
Materials
Brass
Plating
Gold plating over hard nickel
IP rating
IP67

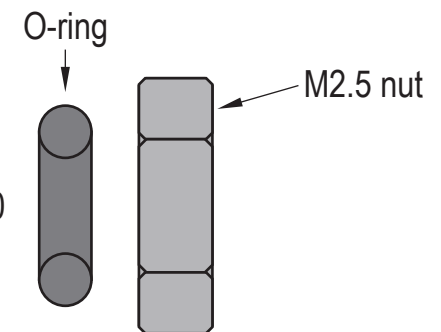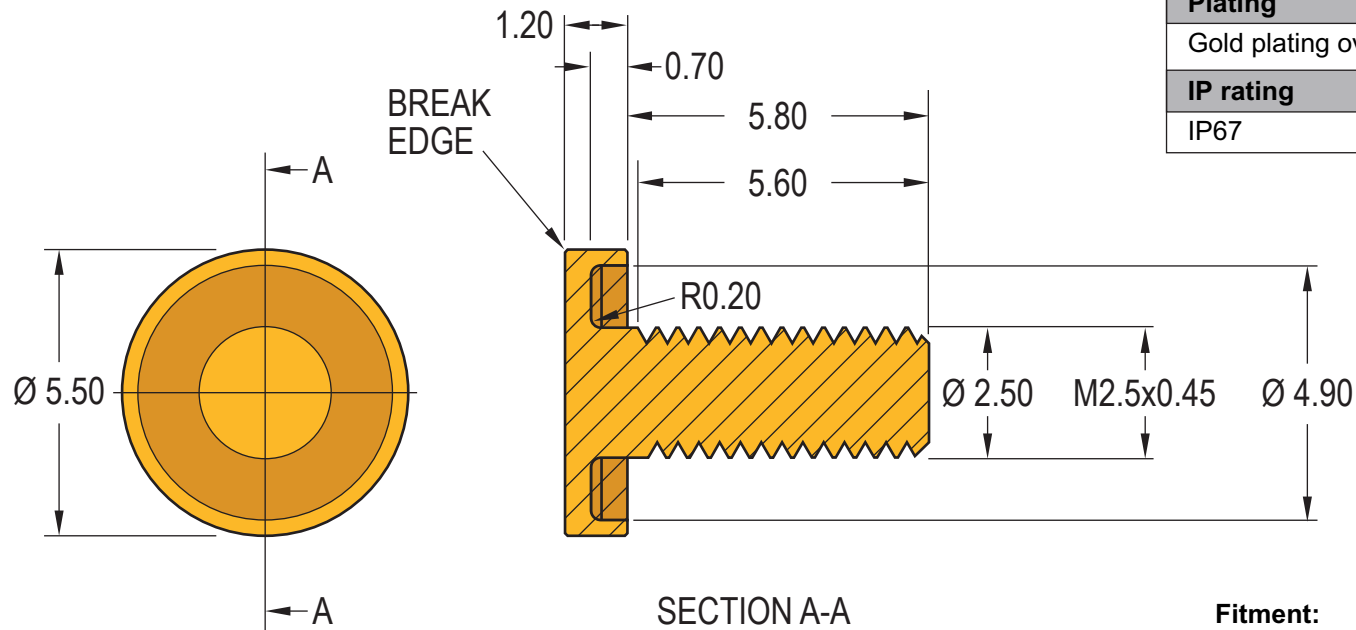

Fitment:
 Under-flush in a 5.5mm diameter hole, 1.5mm deep

Head underside view

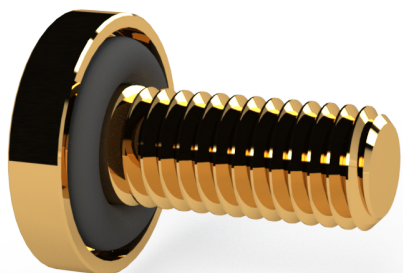

Notes	PART NUMBER		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
Panel thickness: 3.0 - 4.0mm O-ring: Diameter 2.0 x 1mm ID CS70 shore Buna-N Nut: M2.5 steel	IPM3G		DRAWN IN ACCORDANCE WITH ISO STANDARDS	
	SIZE A4	SCALE NTS		
	RoHS Compliant? <input checked="" type="checkbox"/>		VERSION D1	DATE 25/06/20