


Spring contact pin, back fitment

PD11JST-SP - Light spring



Test Probes & Interfacing Components

Telephone: +44 (0)1787 478678 | sales@coda-systems.co.uk | technical@coda-systems.co.uk | Fax: +44 (0)1787 274194

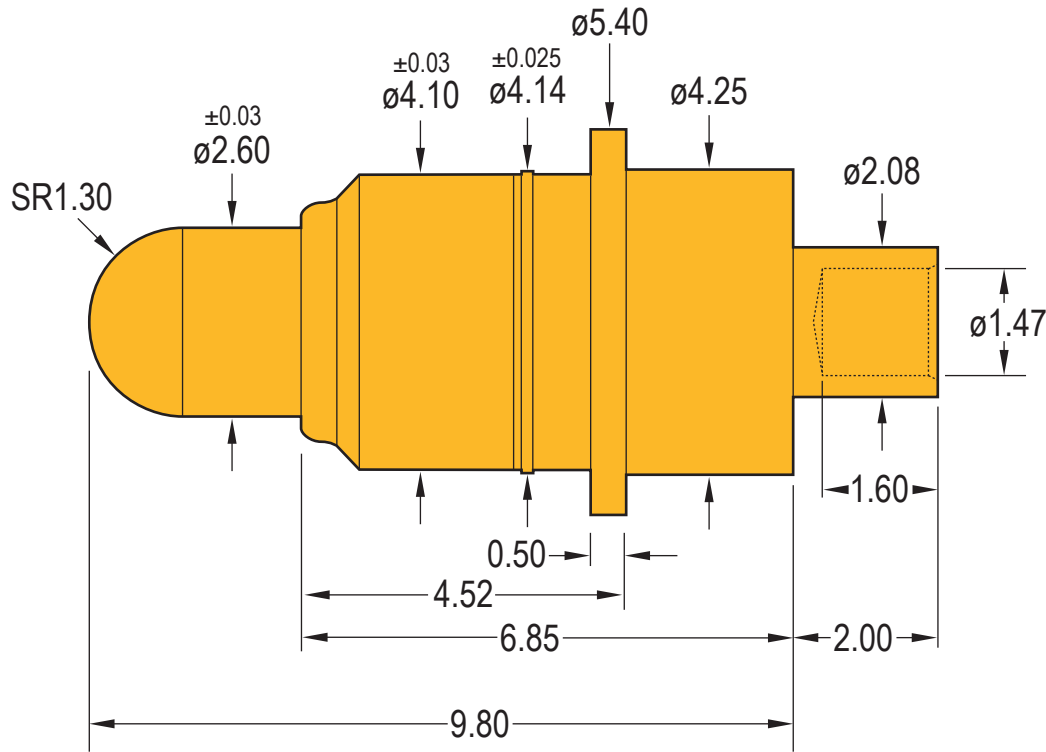

Specifications	
Materials	
Plungers & Barrel; Brass C3604 Spring; SUS304	
Plating	
Contact Surface; 0.25 μ m minimum Au over 1-2 μ m Ni	
Electrical	
Rated current & voltage at working height Quiescent use; 6amps, DC 5V Active use; 3amps, DC 5V	
Mechanical	
Spring force; 120g +/-20% at working height	
Design	
To ensure the best usage, please ensure operation position is based on the working height	
Installation	
<ul style="list-style-type: none"> • Press fitment from the back • Mounting hole size; 4.10mm • Plunger travel at working height; 2.05mm • Connection method; Solder pot or solder in • Panel thickness; 4.0mm 	

PART NUMBER PD11JST-SP		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE A4	SCALE NTS	DRAWN IN ACCORDANCE WITH ISO STANDARDS	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
RoHS Compliant? <input checked="" type="checkbox"/>		DATE 20/08/18	
		VERSION D2	