

SD-DATA-12
Spring loaded data array,
solder pot, cable connection.




**Test Probes &
Interfacing Components**

Telephone: +44 (0)1787 478678



sales@codal-systems.co.uk

technical@codal-systems.co.uk

Front view (both connectors)

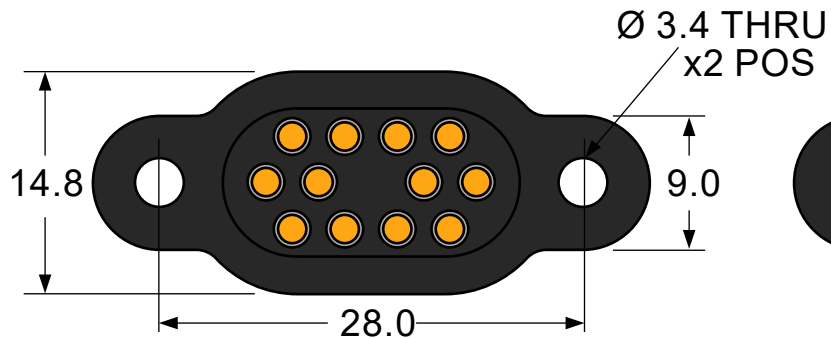


Back view (both connectors)

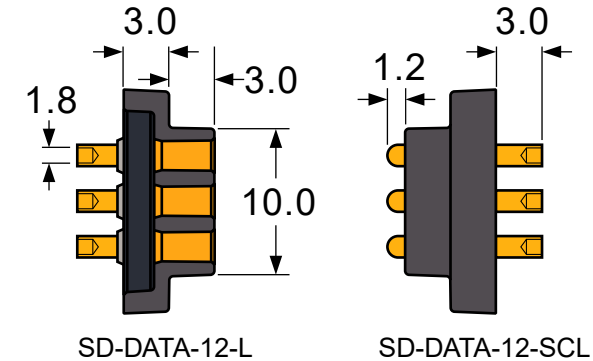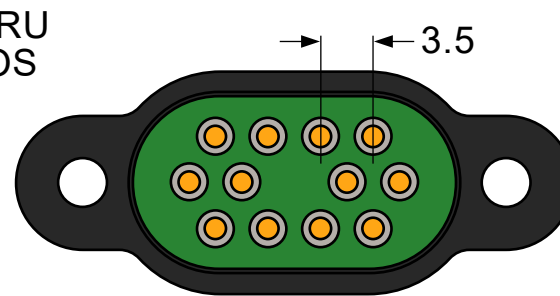

Spring force at 2.0mm travel	45g
Combined spring force (x12)	540g

Spring contact: PD14JLT-SP
Ideal compression: 2.0mm

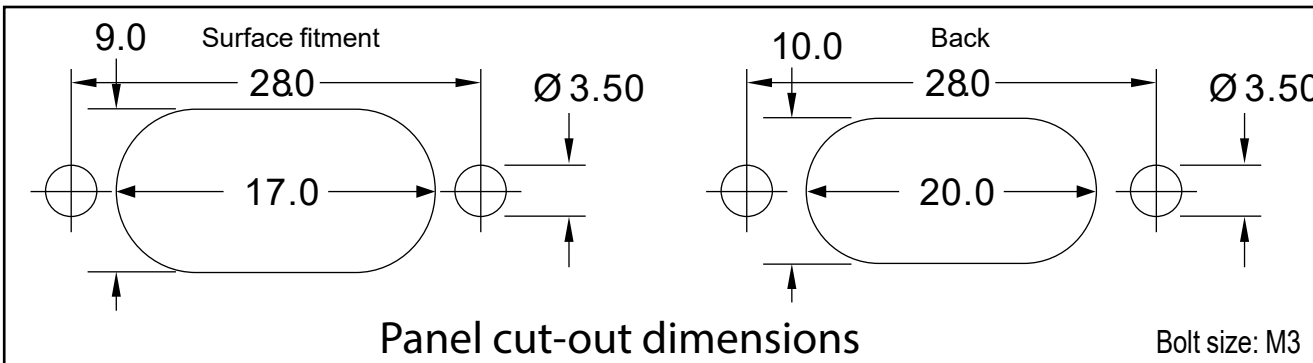

PART NUMBER SD-DATA-12-SCL & SD-DATA-12-L		REGISTERED COMMUNITY DESIGN REGISTRATION NUMBER UK: SD-DATA-12-L: 6 208 844, EU: 009 032 238-0005 UK: SD-DATA-12-SCL: 6 208 845, EU: 009 032 238-0006		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE A4	SCALE NTS	PLASTIC TYPE POLYAMIDE PA66	VERSION D4	TOLERANCES LINEAR .x = ± 0.2mm .xx = ± 0.10mm .xxx = ± 0.025mm SURFACE ANGULAR ± 1°	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHIN 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
RoHS Compliant? <input checked="" type="checkbox"/>			ENGINEER K. PERRY		
DRAWN IN ACCORDANCE WITH ISO STANDARDS					