

SD-DATA-9

Spring loaded data array,
solder wire to PCB pad






Test Probes & Interfacing Components

Telephone: +44 (0)1787 478678

sales@coda-systems.co.uk


technical@coda-systems.co.uk

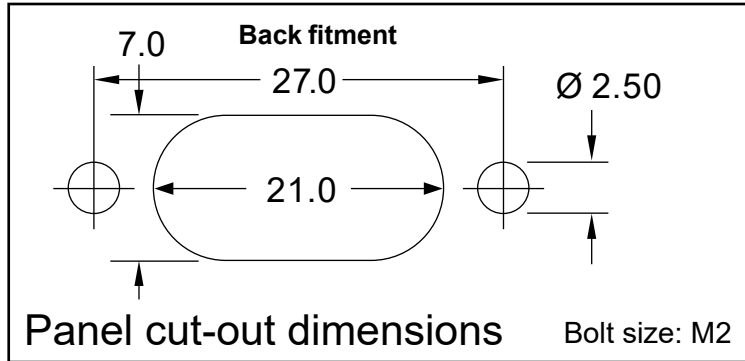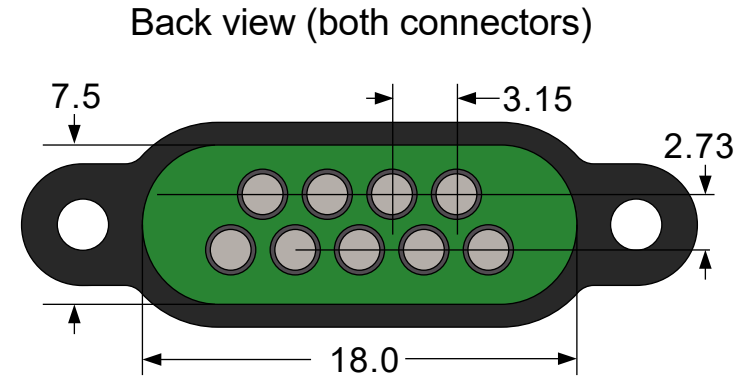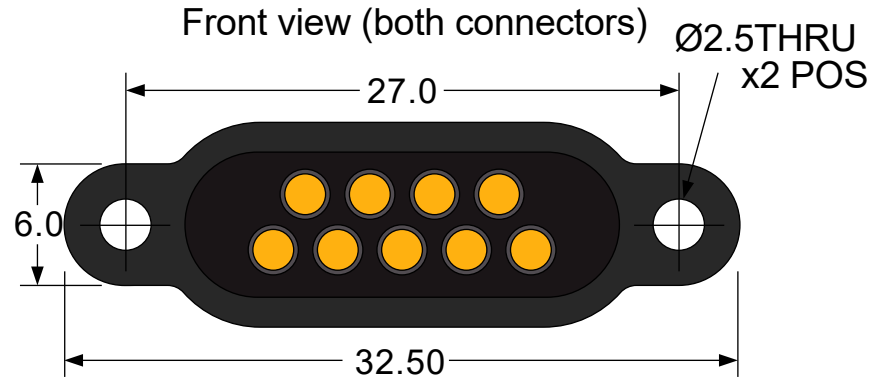


Spring force at 2.0mm travel	45g
Combined spring force (x9)	405g

Spring contact: PD14JLT-SP
Ideal compression: 2.0mm

Side views



SD-DATA-9-L



SD-DATA-9-SCL



PART NUMBER		SD-DATA-9-SCL & SD-DATA-9-L		REGISTERED COMMUNITY DESIGN REGISTRATION NUMBER		THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
UK: SD-DATA-9-L: 6 208 842, EU: 009 032 238-0003	UK: SD-DATA-9-SCL: 6 208 843, EU: 009 032 238-0004		SIZE	SCALE	PLASTIC TYPE	VERSION	TOLERANCES
A4	NTS	POLYAMIDE PA66	RoHS Compliant? <input checked="" type="checkbox"/>		D4	LINEAR .x = ±0.2mm .xx = ±0.10mm .xxx = ±0.025mm	UNLESS OTHERWISE SPECIFIED 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHIN 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE () DIMENSIONS HAVE NO TOLERANCES
ENGINEER K. PERRY	CHECKED BY H. DAVIS	DATE 19/10/21	SURFACE ANGULAR ± 1°		DRAWN IN ACCORDANCE WITH ISO STANDARDS		