




## **Test Probes & Interfacing Components**

Telephone: +44 (0)1787 478678

sales@coda-systems.co.uk

technical@coda-systems.co.uk

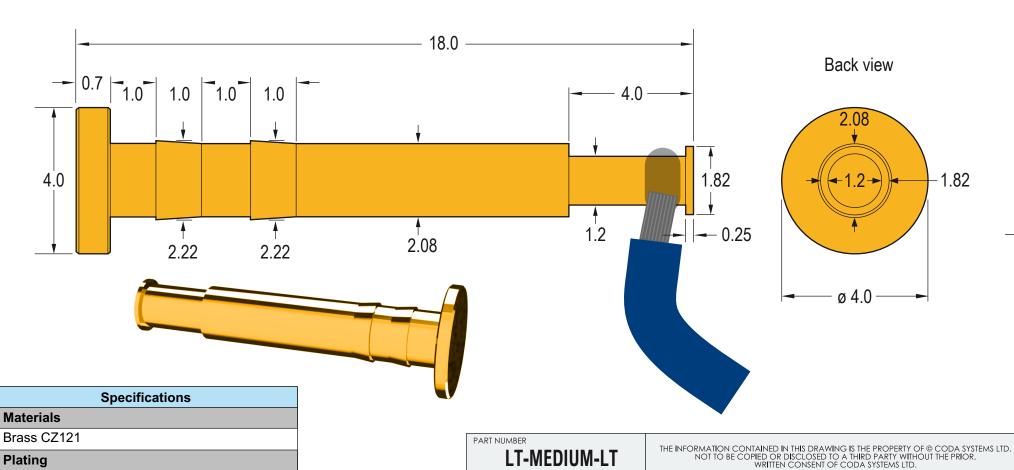

Installation

• Press fitment from the top

Gold plating over E. N. P.

- Mounting hole size; 2.15mm
- Connection method; Solder cable around turret
- Panel thickness; 5.0mm min.

DRAWN IN ACCORDANCE WITH ISO STANDARDS SCALE NTS Α4 DATE **14/04/23 RoHS Compliant?** 

2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX

VERSION

5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm

**UNLESS OTHERWISE SPECIFIED** 

1. DIMENSIONS ARE IN MM

- 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm
- 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm
- 9. REFERENCE ( ) DIMENSIONS HAVE NO TOLERANCES

**D1**