

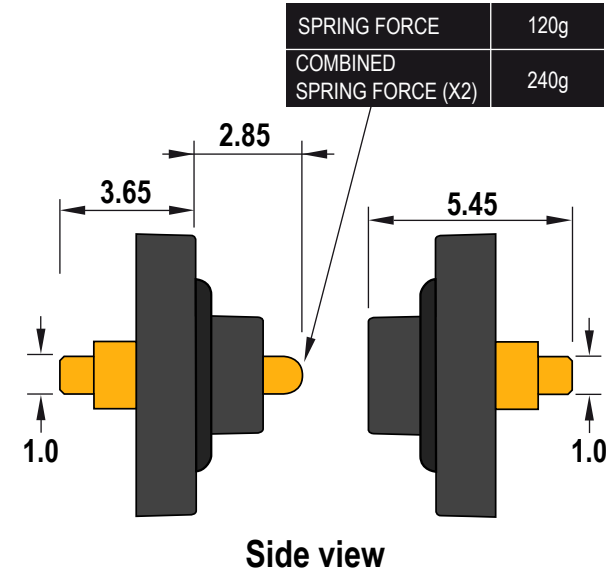


**SDi-MICRO-2-SCT & LT**  
Spring loaded docking connector, direct PCB mounting or flexi-PCB

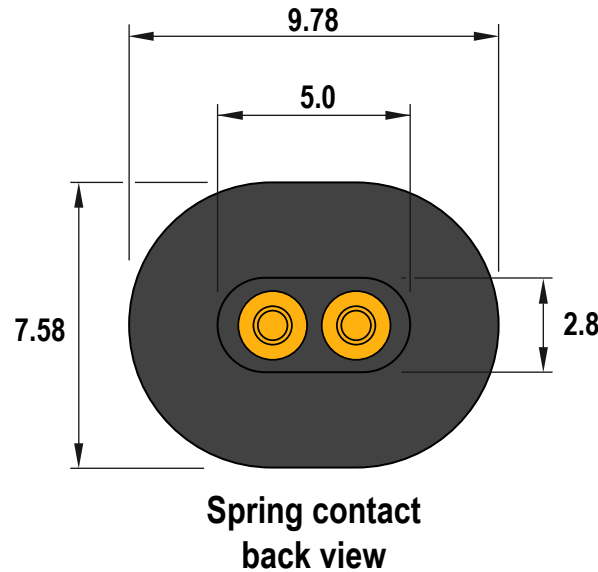


**Test Probes & Interfacing Components**

Telephone: +44 (0)1787 478678 | sales@coda-systems.co.uk | technical@coda-systems.co.uk

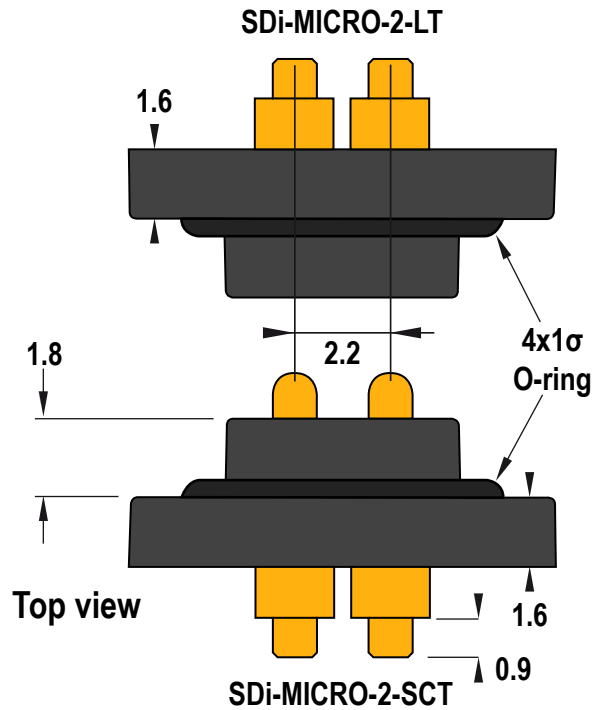

Spring contact: PDOJST  
Contact land: IPPORT  
Ideal compression of PDO: 0.8mm



**Panel cut-out dimensions**

PART NUMBER <b>SDi-MICRO-2-SCT &amp; SDi-MICRO-2-LT</b>				THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF © CODA SYSTEMS LTD. NOT TO BE COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT THE PRIOR, WRITTEN CONSENT OF CODA SYSTEMS LTD.	
SIZE <b>A4</b>	SCALE <b>NTS</b>	PLASTIC TYPE <b>POLYAMIDE PA66</b>	VERSION <b>A</b>	<b>TOLERANCES</b> .x = ± 0.2mm .xx = ± 0.10mm .xxx = ± 0.025mm  <b>SURFACE</b> ANGULAR ± 1°	
<b>RoHS Compliant?</b> <input checked="" type="checkbox"/>				<b>UNLESS OTHERWISE SPECIFIED</b> 1. DIMENSIONS ARE IN MM 2. DIMENSIONAL LIMITS APPLY AFTER PLATING / COATING 3. REMOVE ALL BURRS AND BREAK EDGES .25 MAX 4. MACHINE FILLET RADIUS .25 MAX 5. MACHINED SURFACES FLAT WITHING 0.08 mm/mm 6. NON-MACHINED SURFACES FLAT WITHIN 0.25 mm/mm 7. DIAMETERS ON COMMON CL TO BE CONCENTRIC WITHIN 0.13 8. PERPENDICULAR SURFACES TO BE SQUARE WITHIN .13 mm/mm 9. REFERENCE ( ) DIMENSIONS HAVE NO TOLERANCES	
ENGINEER <b>G. D</b>		CHECKED BY <b>H. D</b>		DATE <b>18/06/24</b>	DRAWN IN ACCORDANCE WITH ISO STANDARDS